


## Frame Tie

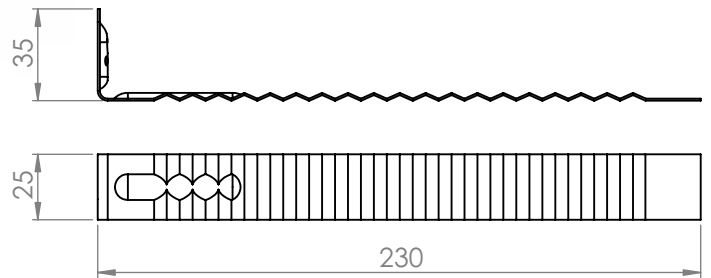

### DESCRIPTION

Frame tie is designed to create a strong connection between brickwork and framework in residential construction.

### FEATURES

- Clay brick
- Multiple fixing application for different substrates
- Universal applications

### FIXING REQUIREMENTS

- 32mm x 5mm dia Mushroom spikes head anchor (Concrete)
- S/Drilling treated pine screws 8g X 32mm galvanised class 3 finished (Timber)
- S/Drilling hex head 10g X 25mm galvanised class 3 finished (Metal)
- For more information contact us with your project requirements.

### CORROSION CHARACTERISTICS

Galvanised Z600 (R2)  
Conforms to corrosion resistance set by AS/NZS 2699.2:2020 / AS 3700.

### ORDERING INFORMATION

When ordering please supply use with the part number and quantity you require

