

Product Code:

CGT 15, CGT 16 and CGT 16T

Please specify code for stainless steel. E.g. CGT 15 (ss-316).

Description:

CGT 15 - Single Leaf Wall Roof Straps.

CGT 16 and CGT 16T - Cavity Wall Roof Straps.

Specifications:


Corrosion Resistance

*R2 Hot Dipped Galvanised

*R3 Stainless Steel - 316 (Coastal and Industrial areas use only stainless steel 316 brick ties.)


Roof straps

Cerra Metal Works PTY. LTD.
 Fac 4 / 29 Hossack street,
 North Coburg, Victoria 3058.
 Ph: (03) 350 5812
 Fax: (03) 354 5575

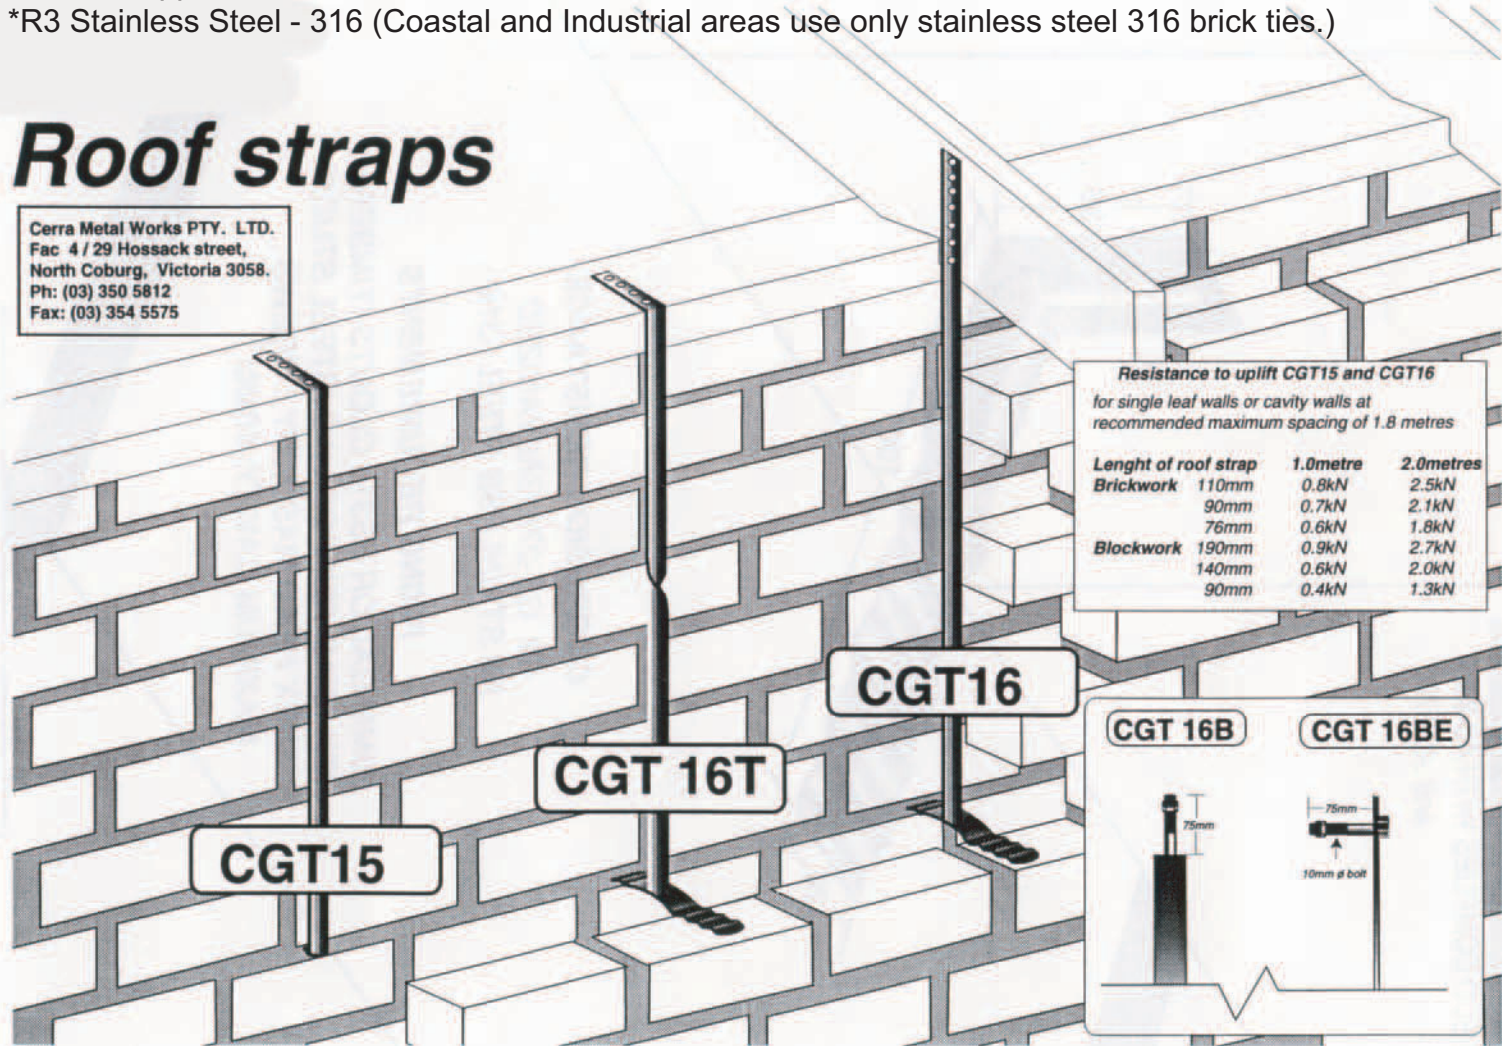

Resistance to uplift CGT15 and CGT16
 for single leaf walls or cavity walls at
 recommended maximum spacing of 1.8 metres

Length of roof strap	1.0metre	2.0metres
Brickwork		
110mm	0.8kN	2.5kN
90mm	0.7kN	2.1kN
76mm	0.6kN	1.8kN
Blockwork		
190mm	0.9kN	2.7kN
140mm	0.6kN	2.0kN
90mm	0.4kN	1.3kN

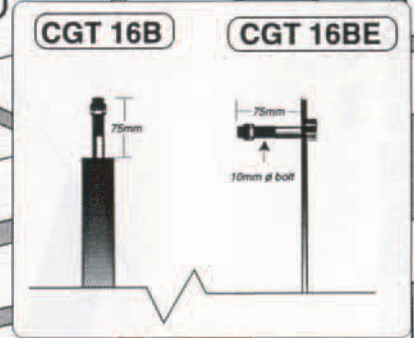

***Fixing Requirements**

- S/Drilling treated pine screws 8g X 32mm galvanised class 3 finished
- S/Drilling hex head 8g X 12mm galvanised class 3 finished